

TYRES for agricultural, implement and garden vehicles, wheelbarrows, carts, trailers and ultralight aircrafts

PNEVMATIKE za poljedelska, delovna vozila, samokolnice, vozičke, prikolice in ultralahka letala

Catalogue/Katalog
Edition/Izdaja 2018



Mitas

Implement agricultural tyres Pnevmatike za poljedelska vozila

Code	Tyre size	Carcass rigidity PR	Tread pattern designation	TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load kg		Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
								Drive wheel	Free Roll wheel			
Koda	Dimenzija pnevmatike	Trdnost karkase	Oznaka dezena	TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev kg		Tlak polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
								Pogonsko kolo	Gnano kolo			
588041	11x6.00-5 (170/45-5)	/	G2	TL	170	280	6.00		200	2.80	10	/
588016	13x5.00-6	4PR	B12	TL/TT	120	328	3.50	185		2.25	20	4.00-6
588065	4.00-8	2PR	B12	TT	105	425	3.00	109		1.50	30	3.50/4.00-8
587988		4PR		TT				160	2.75			
588037	16x6.50-8	4PR	B64	TL/TT	165	408	5.375	200		1.90	30	16x6.50/7.50-8
588040		8PR		TL/TT				325	4.25			
587947	4.00-10	2PR	B12	TT	109	470	3.00	128		1.50	30	4.00-10
588000		4PR		TT				185	2.75			
588005	4.00-12	4PR	B12	TT	109	530	3.00	212		2.75	30	4.00-12
588010	5.00-12	2PR	B12	TT	145	575	4.00	180		1.25	30	5.00-12
587998		4PR		TT				265	2.25			
588046	3.50-6	4PR	B16	TT	96	343	2.50	115		3.00	30	4.00-6
588001	3.50-8	4PR	B16	TT	96	395	2.50	121		3.00	30	3.50/4.00-8
588049	5.00-10	4PR	B16	TT	132	520	3.00	243		2.25	30	5.00-10
588059	5.0-10	2PR	B17	TT	135	515	3.50	180		1.25	30	5.00-10
588057		4PR		TT				257	2.25			
588062	6.5/80-12	4PR	B18	TT	165	600	5.00	355		2.40	30	5.00-12
588014	3.50-6	4PR	B15	TT	96	343	2.50		165	3.00	30	4.00-6
588084	3.50-6	4PR	B15 RIBBED	TT	100	343	2.50		185	2.50	30	4.00-6
588047	3.50-8	4PR	B15	TT	96	388	2.50		185	3.00	30	3.50/4.00-8
588017	18.5x8.50-8 (215/65-8)	6PR	B63	TL	215	460	7.00		425	3.50	30	18x8.50/9.50-8
588036		12PR	B63	TL					600	6.30		




Tyres for wheelbarrows and carts Pnevmatike za samokolnice in vozičke

Code	Tyre size	Carcass rigidity PR	Tread pattern designation	TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load kg		Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
								Drive wheel	Free Roll wheel			
Koda	Dimenzija pnevmatike	Trdnost karkase	Oznaka dezena	TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev kg		Tlak polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
								Pogonsko kolo	Gnano kolo			
588077	4.00-6	2PR	V-5501	TT	114	374	3.00		150	2.10	30	4.00-6
588078		4PR	V-5501	TT				212	2.50			
588079		6PR	V-5501	TT				272	3.50			
588082	3.50-8	2PR	V-5501	TT	100	393	2.50		150	2.10	30	3.50/4.00-8
588083		4PR	V-5501	TT				180	2.50			
588080	4.00-8	2PR	V-5501B	TT	112	418	3.00		165	2.10	30	3.50/4.00-8
588081		4PR	V-5501A	TT				218	2.50			
588042	4.00-6 (14x4)	6PR	B11	TT	109	367	2.50		243	4.25	30	3.50/4.00-6
587980	3.50-8	4PR	B11	TT	98	400	2.50		185	3.00	30	3.50/4.00-8
588043	4.00-8	4PR	B11	TT	109	410	3.00		230	2.75	30	3.50/4.00-8



Implement and garden tyres Pnevmatike za delovna vozila

Code	Tyre size	Carcass rigidity PR	Tread pattern designation	TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load kg		Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
								Drive wheel	Free Roll wheel			
Koda	Dimenzija pnevmatike	Trdnost karkase	Oznaka dezena	TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev kg		Tlak polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
								Pogonsko kolo	Gnano kolo			
587985	13x5.00-6	4PR	B19	TL/TT	124	322	3.50		185	2.25	20	4.00-6
587991		8PR		TL/TT					300	4.25	20	
587982	15x6.00-6	6PR	B19	TL/TT	150	362	4.50		355	3.00	20	15x6.00-6
587981	16x6.50-8	6PR	B19	TL/TT	165	408	5.375		335	3.00	20	16x6.50/7.50-8
587989		10PR		TL/TT					412	3.75		
587994		12PR		TL/TT					450	4.00		
587983	13x5.00-6	4PR	G1	TL/TT	124	322	3.50		185	2.25	20	4.00-6
587992	18x8.50-8	6PR	G1	TL/TT	214	462	7.00		425	2.75	20	18x8.50/9.50-8

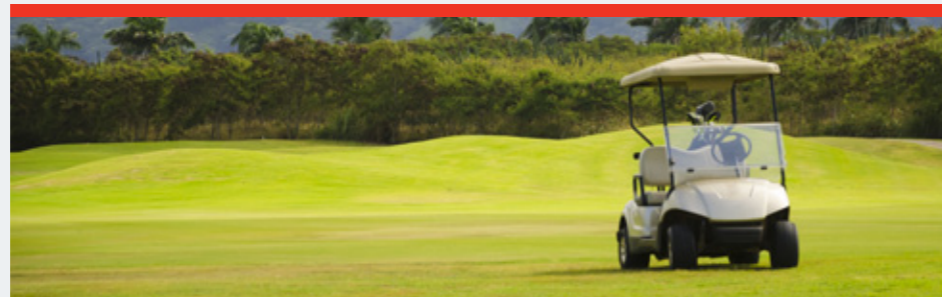

Tyres for ultralight aircrafts Pnevmatike za ultralahka letala

Code	Tyre size	Load index, speed symbol	Tread pattern designation	TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load kg	Inflation pressure (bar)	Max speed (km/h)	Corresponding tube
Koda	Dimenzija pnevmatike	Oznaka nosilnosti, simbol hitrosti	Oznaka dezena	TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev kg	Tlak polnjenja (bar)	Maks. hitrost (km/h)	Ustrezna zračnica
588128	4.00-6 (14x4)	66L	B11	TT	105	360	2.50	300	4.25	120	4.00-6



Tyres for trailers Pnevmatike za prikolice

Code	Tyre size	Load index, speed symbol	Tread pattern designation	TL/TT	Tyre width (mm)	Outer diameter (mm)	Rim	Load (Kg)	Inflation pressure (bar)	Max speed (km/h)
Koda	Dimenzija pnevmatike	Oznaka nosilnosti, simbol hitrosti	Oznaka dezena	TL/TT	Širina plašča (mm)	Zunanji premer (mm)	Platišče	Obtežitev (Kg)	Tlak polnjenja (bar)	Maks. hitrost (km/h)
573368	3.50-8	46J (4PR)	B13	TT	92	386	2.50	170	2.50	100
573354	4.00-8 C	71J (6PR)	B13	TT	108	415	3.00	345	4.25	100
573356	4.00-8 C	66N (4PR)	B13	TL/TT	108	415	3.00	300	3.50	140
573390	3.50-10	59J REINF.	B14	TT	92	437	2.50	243	3.25	100
573384	4.00-10C	69J (4PR)	B14	TL/TT	108	466	3.00	325	3.50	100
573385	4.00-10C	74J (6PR)	B14	TL/TT	108	466	3.00	375	4.25	100
588217	4.80/4.00-8	70N (6PR)	B61	TL	116	416	2.50	335	5.00	140
588230	4.50-10 M+S	76N (6PR)	B61	TL	134	495	3.50	400	4.25	140
588220		72N (4PR)		TL				522	355	3.50
588231	5.00-10 M+S	79N (6PR)	B61	TL	146	522	3.50	437	4.25	140
588182	145-10 M+S	79N (6PR)	B61	TL	146	504	3.50	437	4.25	140
588171	18x8.0-10 (195/50 B10)	98N	B62	TL	188	453	6.00	750	6.00	140
588213	195/55-10C	98/96N	B62	TL	208	472	7.00	750/710	6.25	140



Tubes Zračnice

Code	Tube size	Valve type	Code	Tube size	Valve type	Code	Tube size	Valve type
Koda	Dimenzija zračnice	Vrsta ventila	Koda	Dimenzija zračnice	Vrsta ventila	Koda	Dimenzija zračnice	Vrsta ventila
576859	260x85/3.00-4	DIN 7777	576952	13x5.00-6	JS87N	576856	16x6.50/7.50-8	TR13
576978	4.00-4	JS87N 90/90	576953	13x5.00-6	JS89	576862	5.00-10	TR13
576849	4.00-6	TR13	576852	4.00-10	TR13	576854	5.00-12	TR13
576863	4.00-6	JS87 90/90	576876	4.00-10 BOX	JS87 90/90	576857	18x8.50/9.50-8	TR13
576851	3.50/4.00-8	TR13	576855	15x6.00-6	TR13	576980	5.00-8	TR13
576865	3.50/4.00-8	JS87 90/90	576853	4.00-12	TR13	593267	5.00-8 HEAVY DUTY	TR13CW

Savatech d.o.o.
Škofjeloška cesta 6, 4000 Kranj, Slovenia

Phone & E-mail:
+386 4 206 51 23
sasa.krasovec@mitas-tyres.com

+386 4 206 58 75
anze.pintar@mitas-tyres.com

Printing errors and mistakes reserved.



Mitas